


# ブラシレスDCモーター

## RB-3640-68

主な用途：  
ミキサー、遠心分離機、ファン、ポンプ

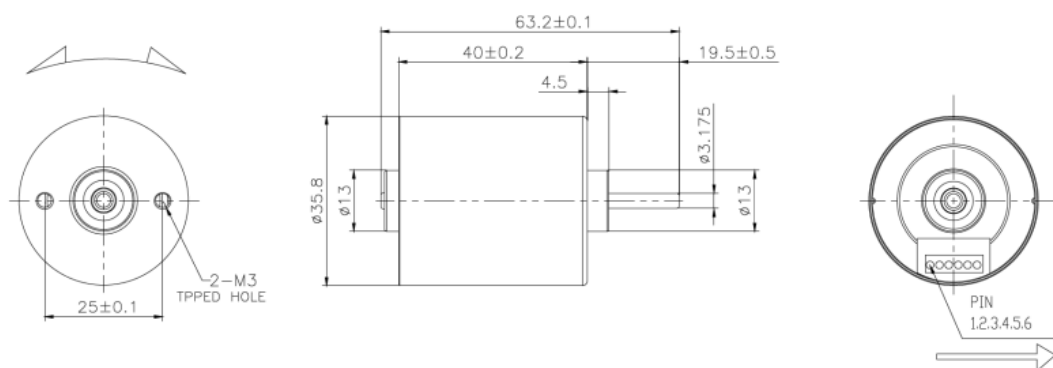

| MODEL           | VOLTAGE         |                | NO LOAD |         | AT MAXIMUM EFFICIENCY |         |        |       |        |      | STALL   |        |
|-----------------|-----------------|----------------|---------|---------|-----------------------|---------|--------|-------|--------|------|---------|--------|
|                 | OPERATING RANGE | NOMINAL        | SPEED   | CURRENT | SPEED                 | CURRENT | TORQUE |       | OUTPUT | EFF  | TORQUE  |        |
|                 |                 |                | rpm     | A       | rpm                   | A       | g.cm   | mN-m  | W      | %    | g.cm    | mN-m   |
| RB-3640-68-N-01 | 9.0V-14.0V      | 12.0V CONSTANT | 7930    | 0.56    | 6405                  | 2.35    | 269.9  | 26.46 | 17.7   | 62.8 | 1404.4  | 137.69 |
| RB-3640-68-N-02 | 19.0V-26.0V     | 24.0V CONSTANT | 3420    | 0.04    | 2920                  | 0.18    | 114.1  | 11.19 | 3.3    | 69.6 | 780     | 76.47  |
| RB-3640-68-N-03 | 19.0V-26.0V     | 24.0V CONSTANT | 16020   | 0.36    | 13416                 | 1.85    | 241.2  | 23.65 | 33.2   | 74.6 | 1484.3  | 145.52 |
| RB-3640-68-N-04 | 8.0V-26.0V      | 12.0V CONSTANT | 4475    | 0.32    | 3840                  | 1.28    | 204    | 20    | 8.04   | 73.5 | 1252.56 | 122.8  |

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

