


ブラシレスDCモーター

RB-3626-68

主な用途：
ATM、ポンプ、オフィス機器

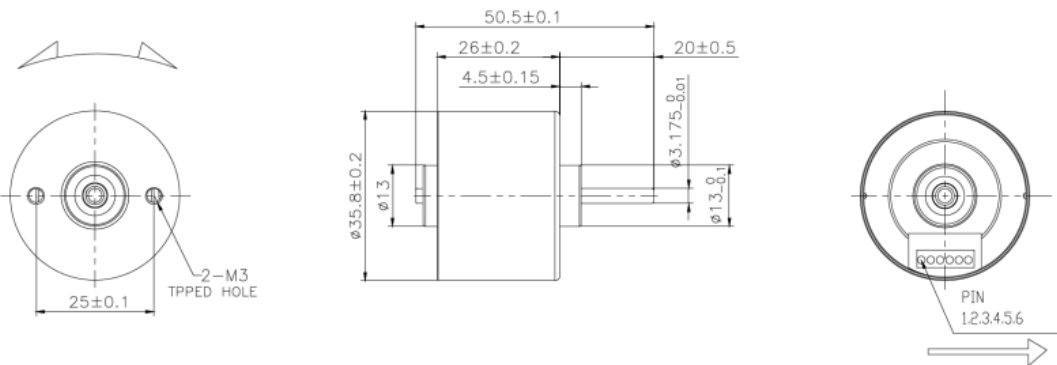

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %	TORQUE g.cm	TORQUE mN-m
RB-3626-68-N-01	9.0V-14.0V	12.0V CONSTANT	2950	0.16	2251	0.52	136.9	13.42	3.2	51.1	578.4	56.71
RB-3626-68-N-02	19.0V-26.0V	24.0V CONSTANT	4680	0.13	3562	0.41	153	15	5.6	56.2	641.1	62.85
RB-3626-68-N-03	19.0V-26.0V	24.0V CONSTANT	11900	0.35	9065	1.08	170.8	16.75	15.9	61	700	68.63
RB-3626-68-N-04	8.0V-26.0V	9.0V CONSTANT	2800	0.11	1900	0.55	137.7	13.5	2.69	57.2	637.5	62.5

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

