


アウトローターブラシレスDCモーター

RB-3711-CE

主な用途：

産業用ドローン、高圧洗浄機、スマート模型ポート

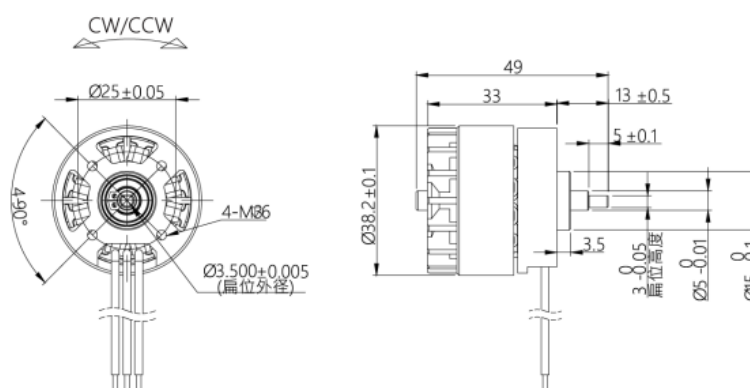

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %	TORQUE g.cm	TORQUE mN-m
RB-3711-CE-N-01	18.0-26.0V	21.6V CONSTANT	26500	2.5	21500	18	1275	125	230	73	3379.67	331.34
RB-3711-CE-N-02	18.0-26.0V	18.0V CONSTANT	22000	2	18000	13.5	1000	98	185	76	2805	275
RB-3711-CE-N-03	12.0V-26.0V	12.0V CONSTANT	22000	3	18000	20.3	1000	98	185	76.34	2805	275
RB-3711-CE-N-04	18.0V-26.0V	24.0V CONSTANT	22000	1.5	18000	10.1	1000	98	185	76.71	2805	275

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

