
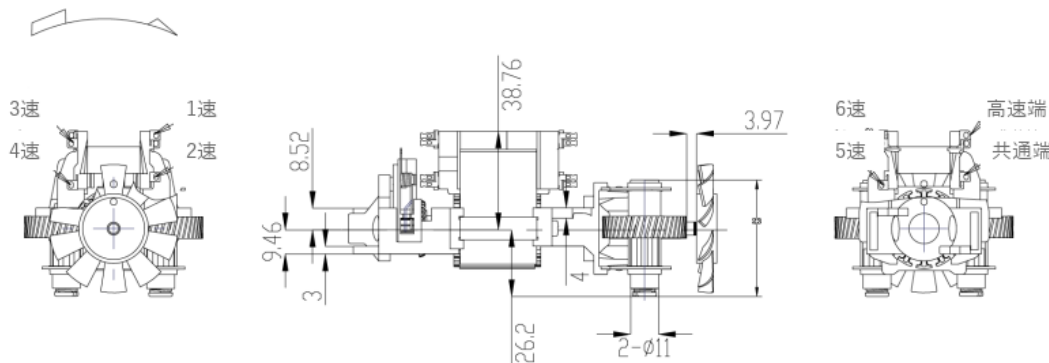


高速ユニバーサルモーター

XU-5530

主な用途：

ブレンダー、ミキサー、フードプロセッサー、キッチン家電

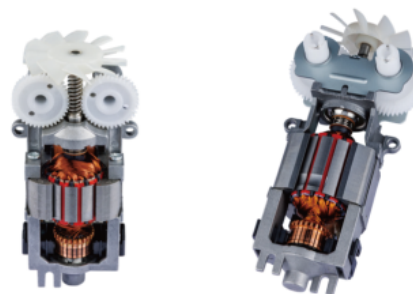

MODEL	VOLTAGE		NO LOAD SPECIFICATIONS													
	OPERATING RANGE	NOMINAL	LEVEL 1		LEVEL 2		LEVEL 3		LEVEL 4		LEVEL 5		LEVEL 6		LEVEL 7	
			SPEED	POWER	SPEED	POWER	SPEED	POWER	SPEED	POWER	SPEED	POWER	SPEED	POWER	SPEED	POWER
			(RPM)	W	(RPM)	W	(RPM)	W	(RPM)	W	(RPM)	W	(RPM)	W	(RPM)	W
U5530L-01	100-120VAC	120V CONSTANT	600	60	760	80	800	93.00	880	105	960	120.00	1060	143	1150	170
U5530L-03	100-120VAC	120V CONSTANT	480	45	660	66	750	80.00	850	96	960	130.00	/	/	/	/
U5530L-06	100-120VAC	120V CONSTANT	480	45	660	66	750	80.00	850	96	960	130.00	960	130	/	/
U5530R-07	220-240VAC	230AV CONSTANT	600	59	740	79	800	93.00	880	105	960	120.00	1060	143	1150	170

シャフト長・性能・EMC対策は用途に応じて調整可能です。詳細は営業担当まで。