


ブラシレスDCモーター

RB-2847-68

主な用途：
アクチュエータ、ポンプ、電動ドライバー

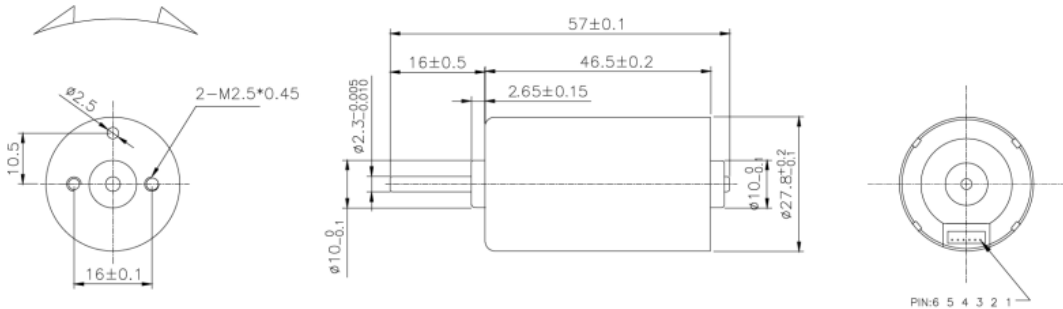

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %	TORQUE g.cm	TORQUE mN-m
RB-2847-68-N-01	9.0V-14.0V	12.0V CONSTANT	6000	0.17	4800	0.68	122.8	12.04	6.1	73.6	618.6	60.65
RB-2847-68-N-02	9.0V-16.0V	12.0V CONSTANT	7300	0.19	5977	0.86	95.5	9.36	5.86	57	527	51.67
RB-2847-68-N-03	9.0V-26.0V	24.0V CONSTANT	7300	0.12	6000	0.55	130	12.75	8.02	60.6	730	71.57
RB-2847-68-N-04	6.0V-12.0V	6.0V CONSTANT	3500	0.19	2600	1.25	193.8	19	5.19	66.5	800.7	78.5

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

