
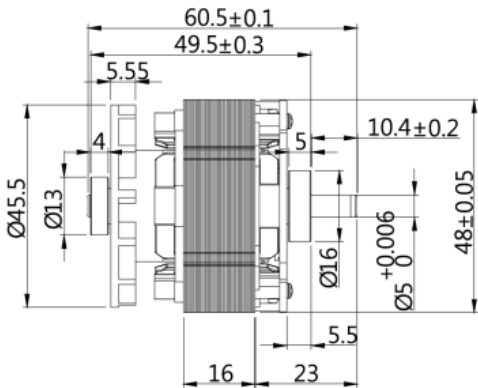


ブラシレスDCモーター

RB-4816-CE

主な用途：
電動工具、ブレンダー、園芸機器

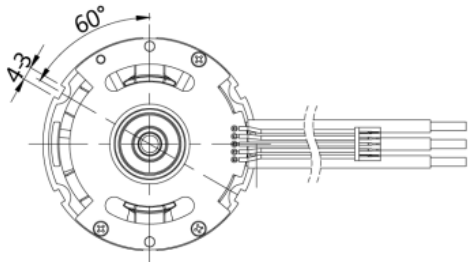

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY							STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %		TORQUE g.cm	TORQUE mN-m
RB-4816-CE-N-01	24.0V-40.0V	36.0V CONSTANT	24500	1.2	18500	10.5	1735	170	330	85		27250	2672
RB-4816-CE-N-02	12.0V-21.0V	18.0V CONSTANT	25000	3.8	19100	30	2284	224	448	83		26800	2672
RB-4816-CE-N-03	12.0V-26.0V	24.0V CONSTANT	25000	3.2	18500	20	1735	170	330	70.95		27250	2672
RB-4816-CE-N-04	12.0V-26.0V	24.0V CONSTANT	24500	1.32	18500	18	1735	170	330	85		27250	2672

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

