


RS-4266DT

主な用途：

大型電動ブラインド、電動ドリル、自動化機器

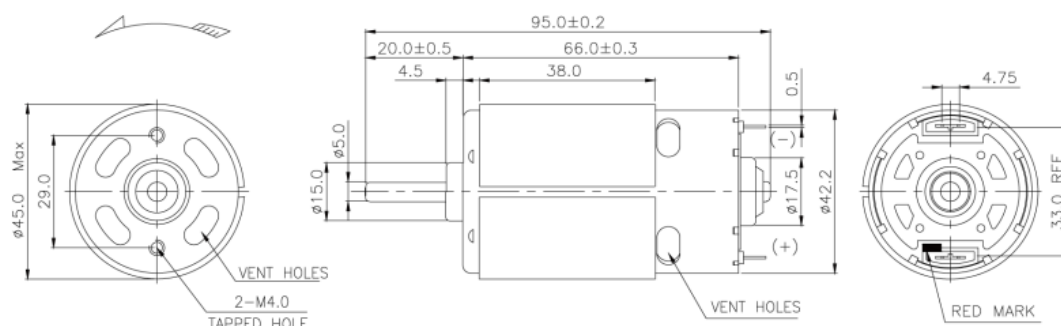

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-42663DT-5080	12.0-18.0	12.0V CONSTANT	5000	0.5	4279	2.7	601.2	58.94	26.4	83	4167	408.53
RS-42663DT-31150	12.0-36.0	24.0V CONSTANT	5300	0.32	4446	1.7	427.1	41.87	19.5	47.8	2650	259.80
RS-42665DT-8014	6.0-18.0	12.0V CONSTANT	13500	1.6	11832	11.3	700	68.63	85.3	62.7	5684	557.25
RS-42665DT-29100	24.0-36.0	24.0V CONSTANT	4000	0.23	3305	1.09	486	47.65	16.5	63.0	2800	274.51

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

