


ブラシ付きDCモーター

RS-3665ST

主な用途：

ハンディドリル、ポータブルファン、自動化機器

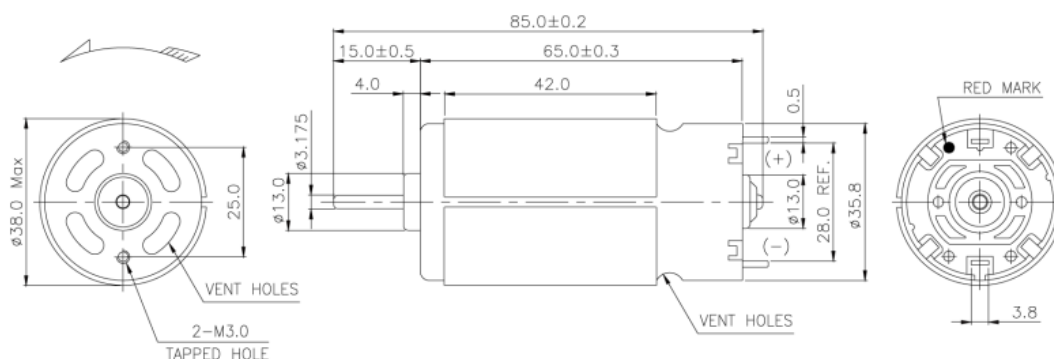

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %	TORQUE g.cm	TORQUE mN-m
RS-36653ST-9012	3.0-9.0	6.0V CONSTANT	17000	2.5	14779	16.6	504.8	49.49	76.5	76.8	3864	378.82
RS-36653ST-6431	12.0-18.0	18.0V CONSTANT	20500	0.9	18175	7	465	45.59	87.0	69.0	4100	401.96
RS-36655ST-3750	6.0-24.0	6.0V CONSTANT	2000	0.2	1621	0.99	262	25.69	4.37	73.5	1560	152.94
RS-36655ST-23120	24.0-36.0	30.0V CONSTANT	5000	0.1	4330	0.65	304	29.80	13.5	69.2	2273	222.84

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

