


RB-4260-68

主な用途：

ブレンダー、遠心分離機、コンプレッサー、手術用工具

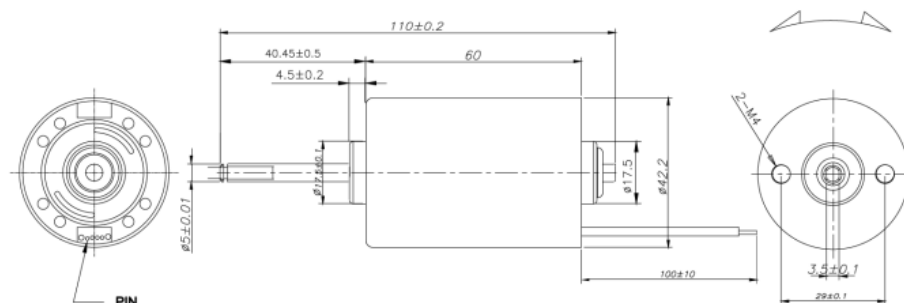

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-4260-68-N-01	9.0V-14.0V	12.0V CONSTANT	6400	0.3	5150	1.23	208.2	20.41	11	74.1	1066.7	104.58
RB-4260-68-N-02	19.0V-26.0V	24.0V CONSTANT	11930	0.41	10005	2.14	436.1	42.75	44.9	87.4	2774.4	272
RB-4260-68-N-03	19.0V-26.0V	24.0V CONSTANT	5950	0.17	5028	0.93	374.8	36.75	19.3	86.9	2418.7	237.13
RB-4260-68-N-04	8.0V-26.0V	12.0V CONSTANT	4600	0.31	3500	1.95	459	45	16.54	85.6	1934.94	189.7

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

