


ブラシレスDCモーター

RB-4240-C8

主な用途：

芝刈り機、サービスロボット、フードプロセッサー、遠心分離機

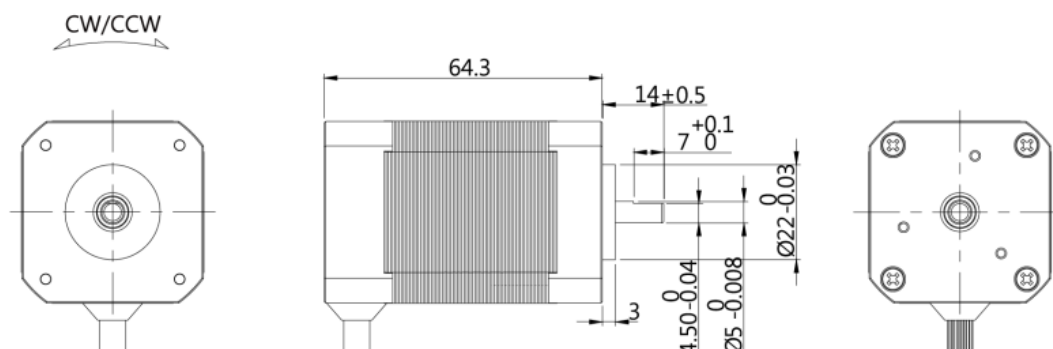

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY							STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF		TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%		g.cm	mN-m
RB-4240-C8-N-01	9.0V-26.0V	24.0V CONSTANT	7000	0.6	6000	4.5	1428	140	88	81		14400	1413
RB-4240-C8-N-02	9.0V-26.0V	12.0V CONSTANT	3500	0.4	3000	2.8	836	82	26	77		7190	705
RB-4240-C8-N-03	9.0V-26.0V	12.0V CONSTANT	7000	0.72	6000	9	1428	140	88	81		14400	1413
RB-4240-C8-N-04	9.0V-26.0V	18.0V CONSTANT	7000	0.55	6000	6	1428	140	88	81		14400	1413

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

