


ブラシレスDCモーター

RB-4266-68

主な用途：

フードプロセッサー、遠心分離機、プリンター、駐車ヒーター、ポンプ

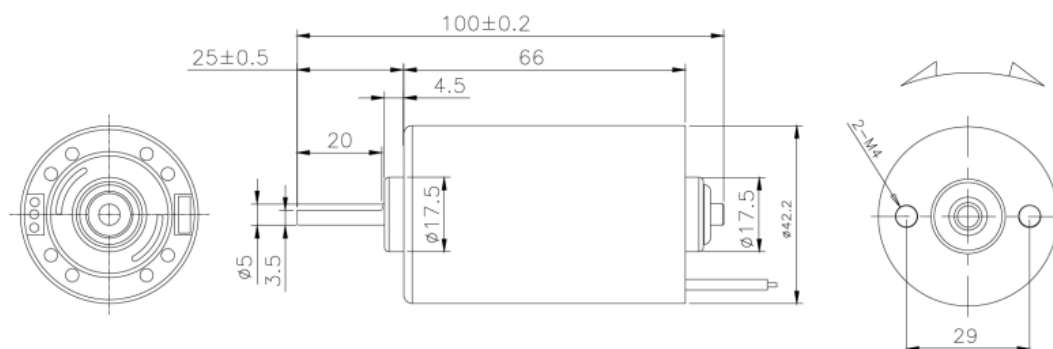

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-4266-68-N-01	9.0V-26.0V	12.0V CONSTANT	4750	0.2	3800	4.1	800	78	38	80	7300	720
RB-4266-68-N-02	9.0V-26.0V	18.0V CONSTANT	7200	0.25	6000	3.6	802	80	54	83	11000	1080
RB-4266-68-N-03	9.0V-26.0V	24.0V CONSTANT	9500	0.28	8000	3.4	867	85	72	85	14680	1440
RB-4266-68-N-04	9.0V-26.0V	24.0V CONSTANT	5000	0.3	3150	3	1600	156.86	30.72	84.78	424.07	41.58

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

