


ブラシ付きDCモーター

RS-50707DT

主な用途：

電動のこぎり、電動ドリル、屋外ファン、ファンヒーター

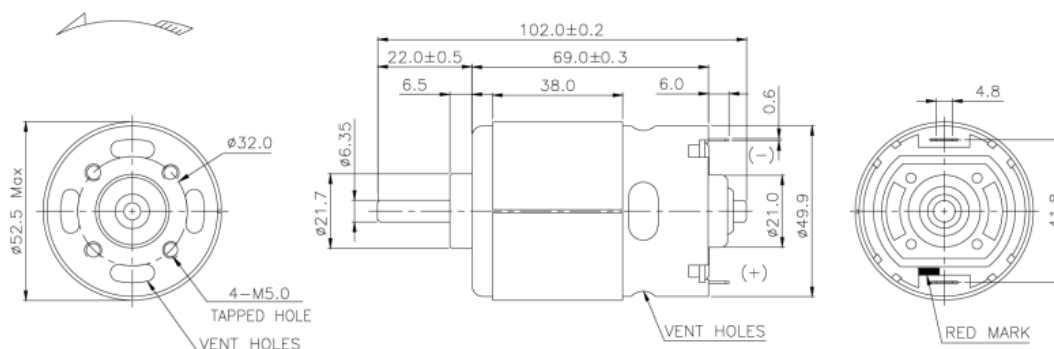

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-50707DT-5625	12.0-24.0	12.0V CONSTANT	5110	1.03	4190	4.48	710	69.61	31.1	58	3944	386.67
RS-50707DT-9008	6.0-14.4	14.4V CONSTANT	21200	4.18	18300	24.5	1183	115.98	226.2	66	8648	847.84
RS-50707DT-7513	12.0-24.0	19.2V CONSTANT	15800	1.75	14059	14.1	1098	107.65	158.4	58.5	9966	977.06
RS-50707DT-4048	12.0-48.0	24.0V CONSTANT	5500	0.42	4735	2.6	765	75.00	37.2	59.6	5500	539.22

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

