


ブラシレスDCモーター

RB-2418-9C

主な用途：
ポンプ、ヘッドライヤー、電動工具

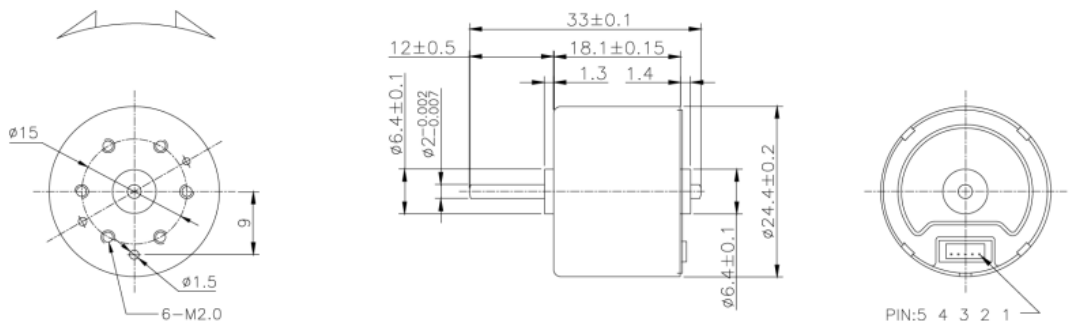

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-2418-9C-N-01	9.0V-16.0V	12.0V CONSTANT	10250	0.29	7585	0.82	73.4	7.2	5.7	57.7	282.4	27.69
RB-2418-9C-N-02	9.0V-16.0V	12.0V CONSTANT	7500	0.07	5563	0.194	21.5	2.11	1.2	52.8	105	10.29
RB-2418-9C-N-03	19.0V-26.0V	24.0V CONSTANT	11900	0.19	8891	0.56	90.6	8.89	8.3	61.4	358.4	35.14
RB-2418-9C-N-04	19.0V-26.0V	24.0V CONSTANT	8700	0.04	6556	0.17	32.9	3.23	2.2	54.4	144	14.12

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

