


ブラシレスDCモーター

RB-3657-68

主な用途：
ブレンダー、遠心分離機、電動工具

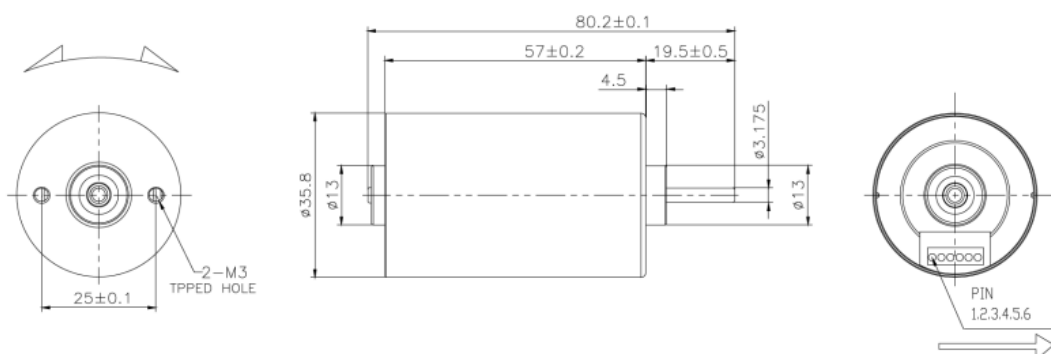

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-3657-68-N-01	9.0V-16.0V	12.0V CONSTANT	3000	0.1	2595	0.75	270	26.47	7.2	79.9	2000	196.08
RB-3657-68-N-02	12.0V-26.0V	24.0V CONSTANT	5000	0.2	4752	1.3	485	47.55	23.6	77.94	3200	313.73
RB-3657-68-N-03	8.0V-26.0V	24.0V CONSTANT	6900	0.35	5200	1.56	428.4	42	22.92	78	2001.24	196.2
RB-3657-68-N-04	8.0V-26.0V	24.0V CONSTANT	27000	0.69	21000	4.35	357	35	77.12	80	1895.16	185.8

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

