


ブラシレスDCモーター

RB-4118-C8

主な用途：
ポータブル人工呼吸器、酸素濃縮器、精密ポンプ

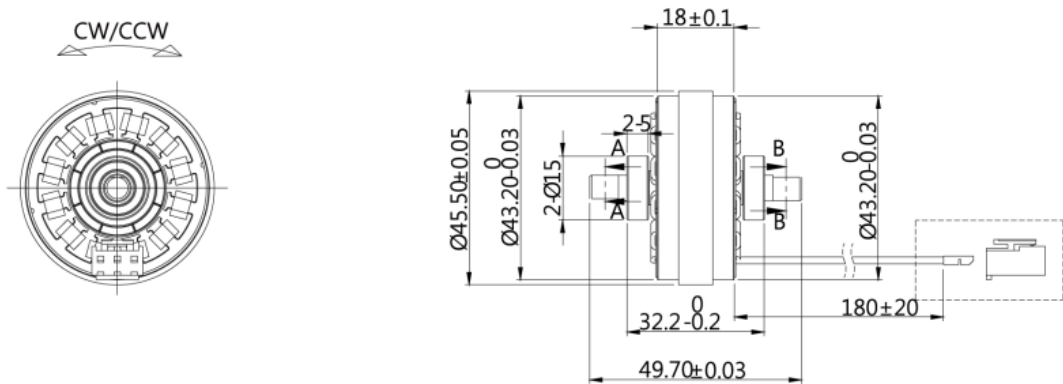

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN-m	OUTPUT W	EFF %	TORQUE g.cm	TORQUE mN-m
RB-4118-C8-N-01	9.0V-16.0V	12.0V CONSTANT	3400	0.28	2800	3.7	1265	124	36	79	8731	856
RB-4118-C8-N-02	9.0V-16.0V	13.0V CONSTANT	3700	0.3	3070	4	1346	132	42	80	9486	930
RB-4118-C8-N-03	6.0V-26.0V	24.0V CONSTANT	3400	0.22	2800	1.85	1265	124	36	82.92	8731	856
RB-4118-C8-N-04	6.0V-26.0V	18.0V CONSTANT	3400	0.25	2800	2.46	1265	124	36	83.67	8731	856

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

