
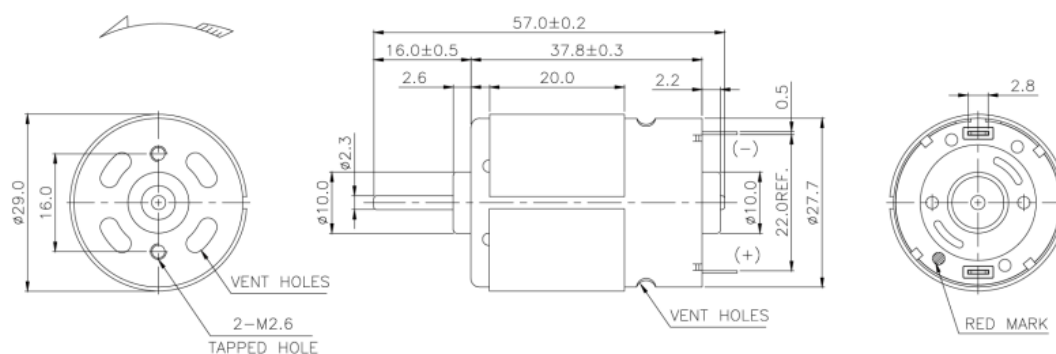


RS-2838ST

主な用途：

高性能ファン、掃除機、電動バリカン、RCモデル

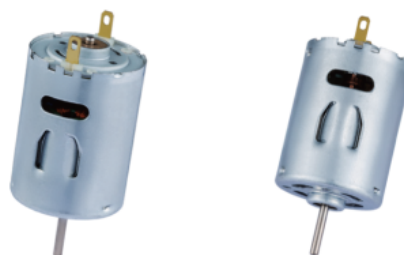

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-28383ST-6016	2.4-4.8	3.6V CONSTANT	20500	1.6	17218	8.4	114.5	11.23	20.2	66.8	715.1	70.11
RS-28383ST-3170	6.0-15.0	12.0V CONSTANT	15500	0.35	13350	2.2	134	13.14	18.4	69.7	968	94.90
RS-28383ST-4540	3.0-9.0	7.2V CONSTANT	16800	0.57	14600	3.77	110	10.78	16.5	30.7	840	82.35
RS-28383ST-20146	12.0-24.0	12.0V CONSTANT	800	0.15	6674	0.6	54.6	5.35	3.74	52.1	329	32.25

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

