


# ブラシ付きDCモーター

## RS-3650SS

### 主な用途：

ハンディ掃除機、エア／ウォーターポンプ、RC車両・ポート

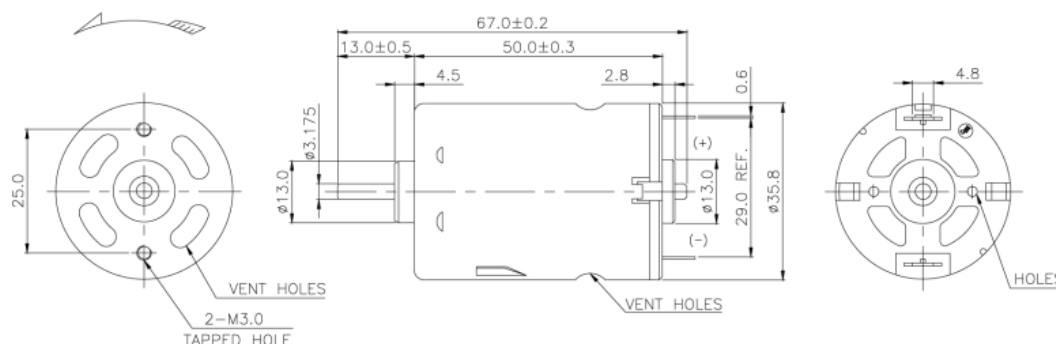

| MODEL            | VOLTAGE         |                | NO LOAD |         | AT MAXIMUM EFFICIENCY |         |        |       |        |      | STALL  |        |
|------------------|-----------------|----------------|---------|---------|-----------------------|---------|--------|-------|--------|------|--------|--------|
|                  | OPERATING RANGE | NOMINAL        | SPEED   | CURRENT | SPEED                 | CURRENT | TORQUE |       | OUTPUT | EFF  | TORQUE |        |
|                  |                 |                | rpm     | A       | rpm                   | A       | g.cm   | mN-m  | W      | %    | g.cm   | mN-m   |
| RS-36503SS-7515  | 2.4-4.8         | 3.6V CONSTANT  | 21500   | 3.2     | 16644                 | 10.9    | 138    | 13.53 | 23.7   | 60.4 | 614    | 60.20  |
| RS-36503SS-6032  | 6.0-12.0        | 12.0V CONSTANT | 29500   | 1.6     | 24016                 | 7       | 212    | 20.78 | 52.1   | 62   | 1138   | 111.57 |
| RS-36505SS-2780  | 12.0-24.0       | 12.0V CONSTANT | 5000    | 0.22    | 4120                  | 1.03    | 172    | 16.86 | 7.27   | 58.8 | 977    | 95.78  |
| RS-36505SS-19150 | 12.0-48.0       | 24.0V CONSTANT | 5600    | 0.12    | 4500                  | 0.53    | 160    | 15.69 | 9.2    | 58   | 815    | 79.90  |

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

