


ブラシレスDCモーター

RB-2832-68

主な用途：
スマートファン、手術用工具、電動カーテン、ポンプ

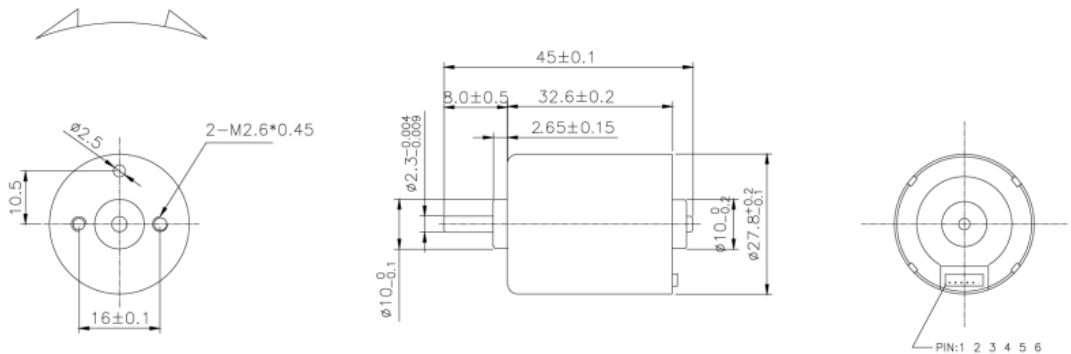

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-2832-68-N-01	9.0-16.0V	12.0V CONSTANT	6100	0.085	5140	0.46	68.47	6.71	3.62	66.19	217.61	21.33
RB-2832-68-N-02	9.0-16.0V	12.0V CONSTANT	5105	0.063	4313	0.34	57.56	5.64	2.55	61.91	185.64	18.2
RB-2832-68-N-03	9.0-16.0V	12.0V CONSTANT	8510	0.13	7220	0.73	85.41	8.37	6.33	72.53	281.79	27.63
RB-2832-68-N-04	18.0-30.0V	24.0V CONSTANT	5912	0.038	4911	0.19	54.99	5.39	2.77	61.91	162.42	15.92

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

