


ブラシ付きDCモーター

RS-2847ST

主な用途：

ハンディフードプロセッサー、電動ドリル、掃除機、子供用電動乗用玩具

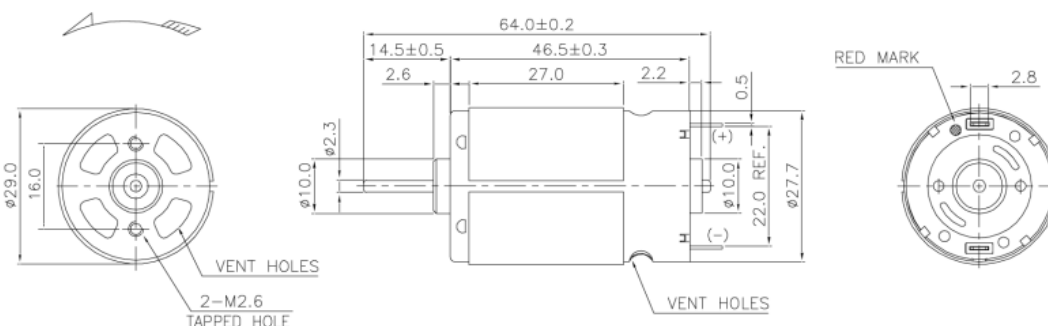

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-28473ST-5022	3.0-6.0	6.0V CONSTANT	20800	1	17830	5.34	140	13.73	25.6	80.0	980	96.08
RS-28473ST-19150	12.0-36.0	24.0V CONSTANT	12000	0.18	9900	0.87	140	13.73	14.2	68.0	800	78.43
RS-28475ST-17100	12.0-30.0	12.0N CONSTANT	4800	0.08	3960	0.38	70.3	6.89	2.85	62.5	400	39.22
RS-28475ST-2453	12.0-26.0	24.0V CONSTANT	17900	0.23	15370	1.42	160	15.69	25.2	74	1130	110.78

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

